



DEVELOPED FOR **DEMANDING** AND **HARSH ENVIRONMENTS**

HYGIENIC CERTIFIED COMPONENTS

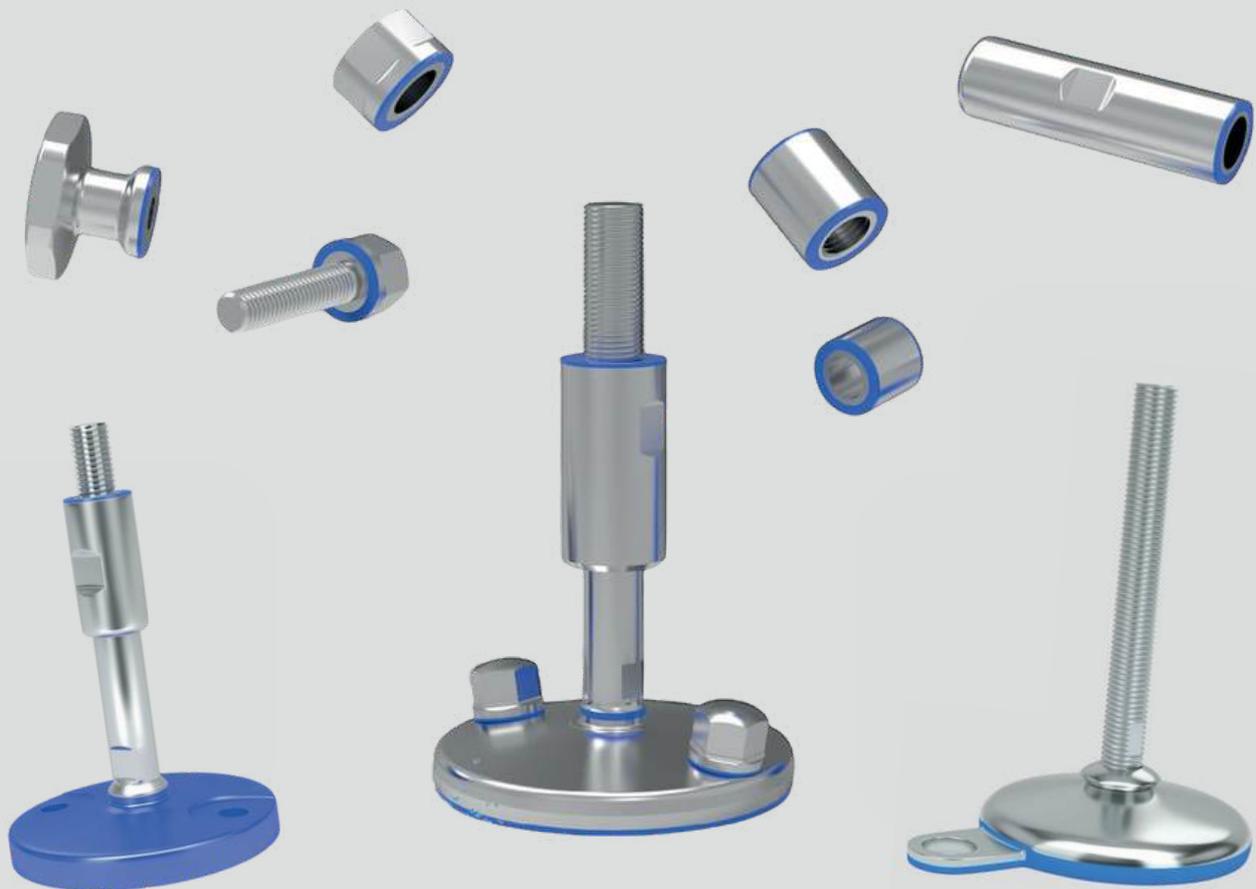


EHEDG-certified and 3A authorised machine levelling feet



The levelling feet certified by EHEDG and authorised by 3-A for sanitary production. Self-draining, fully sealed, and thread-free –for easier cleaning and maximum hygiene.




Machine feet material

Base plate stainless steel 304 (Aisi 1.4301) Spindle stainless steel A2-70 or A4-70 Rubber base NBR Rubber (Nitrile rubber CAS no. 9005-98-5) FDA Certificate according to FDA CFR 21 177 2600 All materials are highly resistant to chemicals and commonly applied cleaning agents and resistant to oils and fats

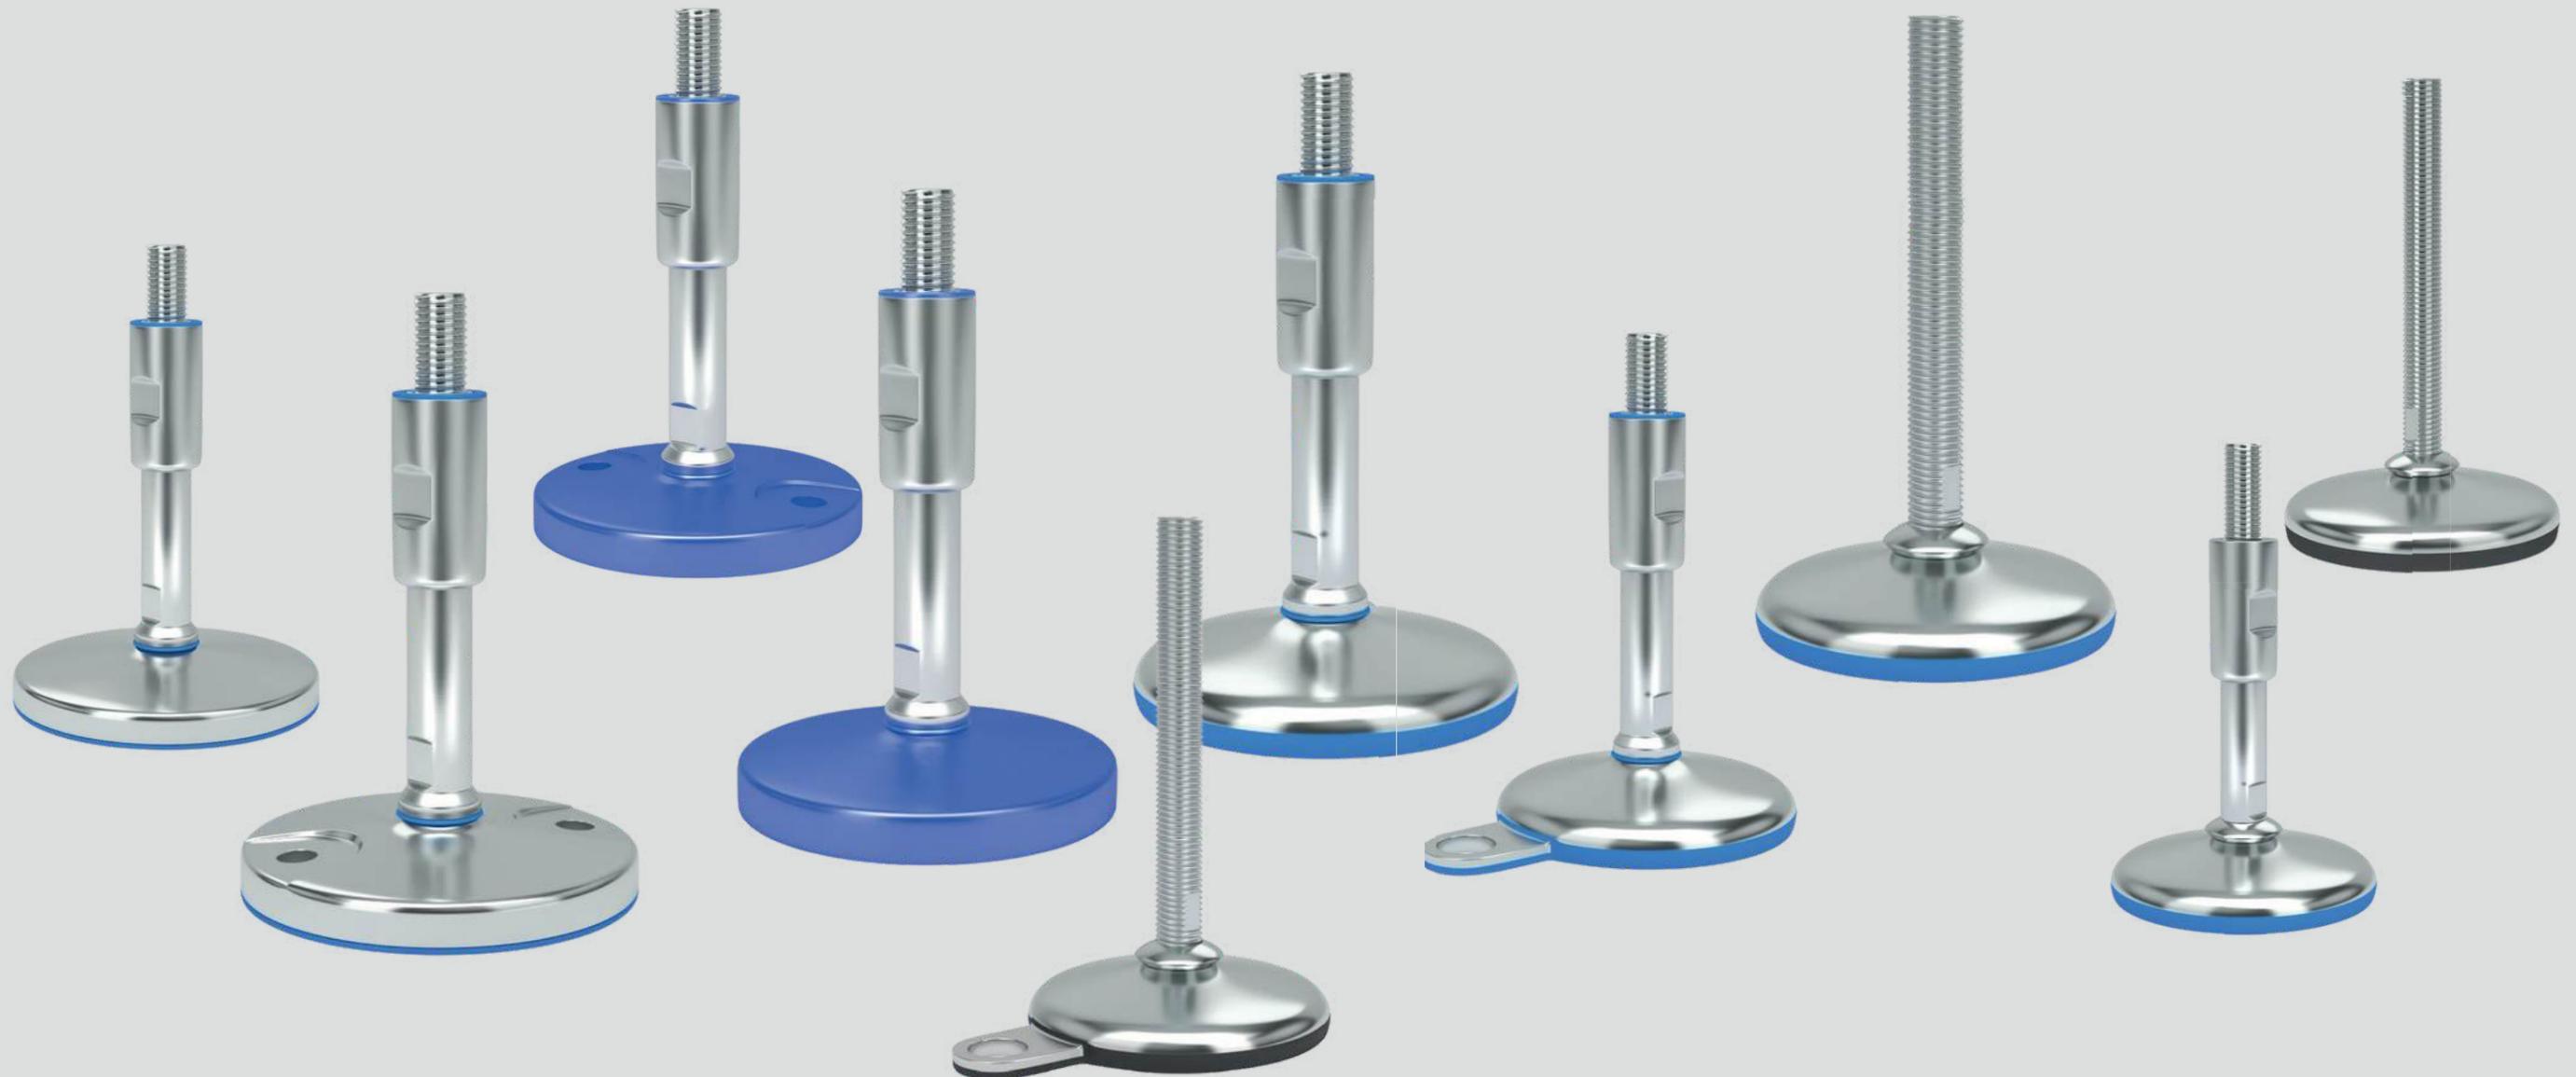

3A/EHEDG Hygienic Stainless solid base feet with sealed spindle

The hygienic stainless solid base feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications. The spindle and base are sealed with silicone gasket. The sleeve is sealed with silicone gasket to the smooth end of the spindle and sealed to the mounting place at the equipment with silicone gasket. The sleeve also functions as a nut.

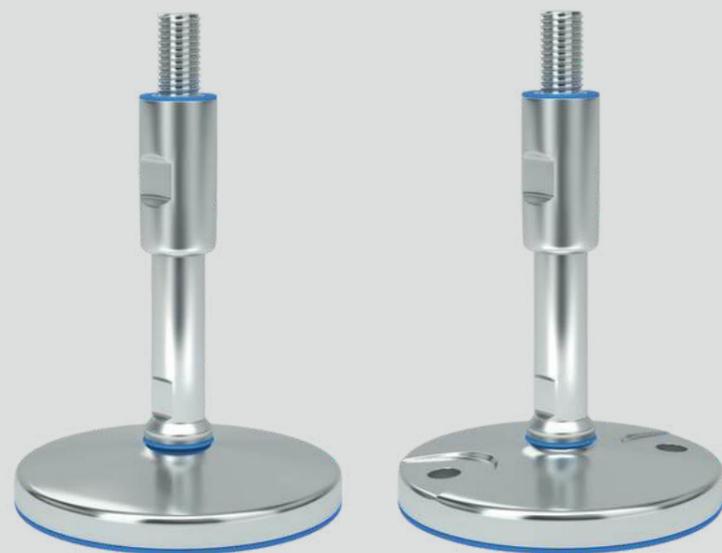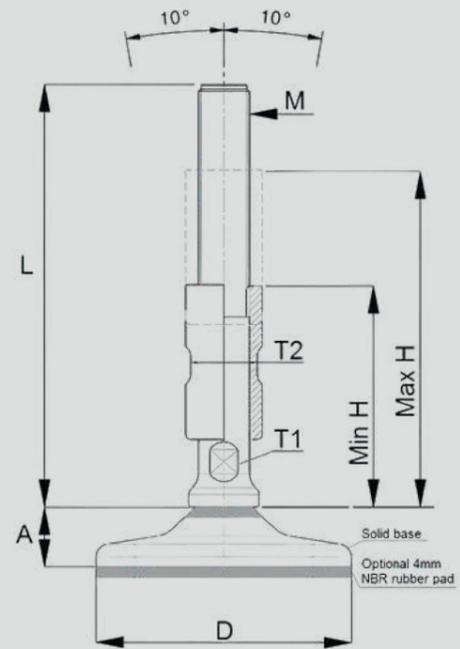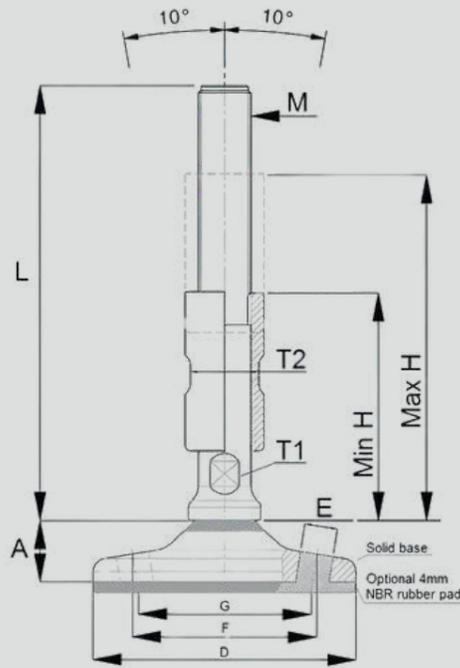

The solid stainless steel 1.4301 base plate is optional included with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber pad. Height of pad 4mm

- HSF 3A base : 3A and FDA certified
- HSFB 3A base: 3A, EHEDG and FDA certified (2 EHEDG bolts (page 18/19) and NBR rubber pad mandatory for full EHEDG certification)

3A/EHEDG Hygienic Stainless solid base feet with sealed spindle



Ordering code : CSF (B) [Diam.base D] + 3A-M [Threads M]x[L]/[H]-(A)

Example : CSF78 + 3A-M20x135/55-(A)

* **BLUE** - stock/preferred type

GREY - On request



| CSF base* | CSF58 3A | CSF78 3A | CSF98 3A | CSF118 3A | CSF138 3A | CSF158 3A | CSF178 3A |
|----------------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|
| Base Diameter D [mm] | 58 | 78 | 98 | 118 | 138 | 158 | 178 |
| Base Height A [mm] | 22 | 22 | 22 | 22 | 23 | 24 | 25 |



| | CSFB78 | CSFB98 | CSFB118 | CSFB138 | CSFB158 | CSFB178 |
|----------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| CSFB Base incl fixation * | 3A | 3A | 3A | 3A | 3A | 3A |
| Base Diameter D [mm] | 78 | 98 | 118 | 138 | 158 | 178 |
| Base Height A [mm] | 22 | 22 | 22 | 23 | 24 | 25 |
| Lock hole distance G [mm] | 58 | 71.5 | 85.5 | 105.5 | 125.5 | 145.5 |
| Lock hole diameter E [mm] | 8.5 | 12.5 | 16.5 | 16.5 | 16.5 | 16.5 |

3A-Spindle including the sleeve with silicone seals and M10 fixation to base (Type A)



M(thread)

| | | | | |
|------------|-------------------|-------------------|-------------------|--------------------|
| M16 | 3A-M16x135/55-(A) | 3A-M16x175/75-(A) | 3A-M16x215/95-(A) | |
| M20 | 3A-M20x135/55-(A) | 3A-M20x175/75-(A) | 3A-M20x215/95-(A) | 3A-M20x255/115-(A) |
| M24 | | 3A-M24x175/75-(A) | 3A-M20x215/95-(A) | 3A-M24x255/115-(A) |
| M30 | | | 3A-M30x215/95-(A) | 3A-M24x255/115-(A) |

Adj. Height (Hmin-Hmax)



| | 3A- Spindle (L) | Sleeve (H) |
|-------------------------------------------|-----------------|------------|
| Adjustable height Min 80 mm – Max 120 mm | L=135 mm | H=55 mm |
| Adjustable height Min 100 mm – Max 160 mm | L=175 mm | H=75 mm |
| Adjustable height Min 120 mm – Max 200 mm | L=215 mm | H=95 mm |
| Adjustable height Min 140 mm – Max 240 mm | L=255 mm | H=115 mm |



- **Accessories : EHEDG bolt and rubber pad can be found on pages 18/19**

3A/EHEDG Hygienic adjustable solid base feet with sealed spindle

The hygienic adjustable solid base feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications. The spindle and base are sealed with silicone gasket. The sleeve is sealed with silicone gasket to the smooth end of the spindle and sealed to the mounting place at the equipment with silicone gasket. The sleeve also functions as a nut.

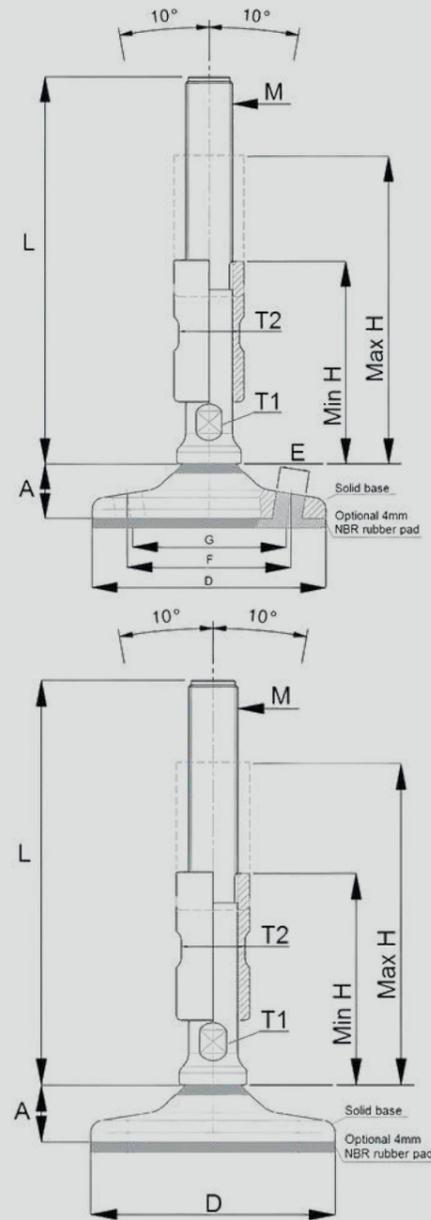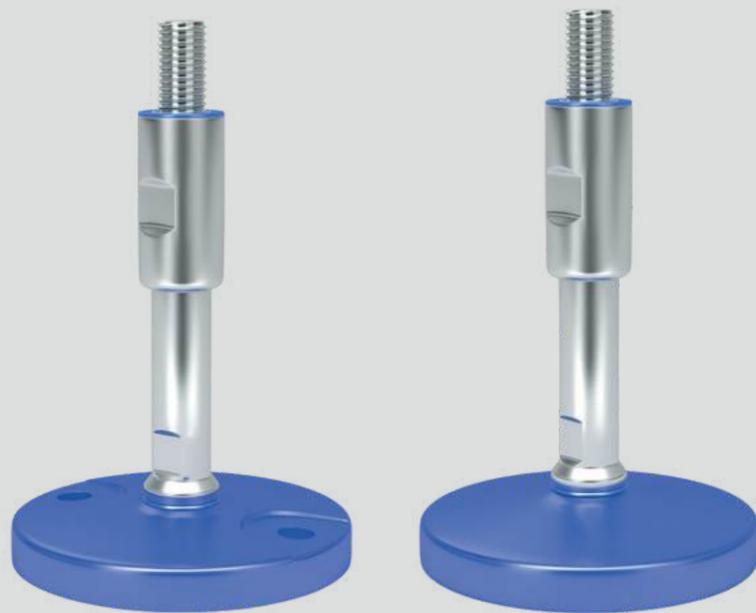

The solid blue anti-bacterial POM base plate optional included blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber pad. Rubber pad height 4mm

- HAF base : 3A and FDA certified
- HAFB base: 3A, EHEDG and FDA certified (2 EHEDG bolts (page 18/19) and NBR rubber pad mandatory for full EHEDG certification)

3A/EHEDG Hygienic adjustable solid base feet with sealed spindle



Ordering code : CAF (B) [Diam.base D] + 3A-M[Threads M]x[L]/[H]-(A)

Example : CAF78-3A + M20x135/55-(A)

* **BLUE** - stock/preferred type

GREY - On request



CAF base *

| | CAF 58 | CAF78 3A | CAF98 3A | CAF118 3A | CAF138 3A |
|----------------------|--------|----------|----------|-----------|-----------|
| Base Diameter D [mm] | 58 | 78 | 98 | 118 | 138 |
| Base Height A [mm] | 22 | 22 | 22 | 22 | 23 |



CAFb base with fixation *

| | CAFb 78 | CAFb98 -3A | CAFb119 -3A | CAFb139 -3A |
|---------------------------|---------|------------|-------------|-------------|
| Base Diameter D [mm] | 78 | 98 | 118 | 138 |
| Base Height A [mm] | 22 | 22 | 22 | 23 |
| Lock hole distance G [mm] | 58 | 71.5 | 85.5 | 105.5 |
| Lock hole diameter E [mm] | 8.5 | 12.5 | 16.5 | 16.5 |

3A-Spindle including the sleeve with silicone seals and M10 fixation to base (Type A)



M(thread)

| | | | | |
|-----|-------------------|-------------------|-------------------|--------------------|
| M16 | 3A-M16x135/55-(A) | 3A-M16x175/75-(A) | 3A-M16x215/95-(A) | |
| M20 | 3A-M20x135/55-(A) | 3A-M20x175/75-(A) | 3A-M20x215/95-(A) | 3A-M20x255/115-(A) |
| M24 | | 3A-M24x175/75-(A) | 3A-M20x215/95-(A) | 3A-M24x255/115-(A) |
| M30 | | | 3A-M30x215/95-(A) | 3A-M24x255/115-(A) |





Adj. Height (Hmin-Hmax)

| Adj. Height (Hmin-Hmax) | 3A-Spindle (L) | Sleeve (H) |
|-------------------------------------------|----------------|------------|
| Adjustable height Min 80 mm – Max 120 mm | L=135 mm | H=55 mm |
| Adjustable height Min 100 mm – Max 160 mm | L=175 mm | H=75 mm |
| Adjustable height Min 120 mm – Max 200 mm | L=215 mm | H=95 mm |
| Adjustable height Min 140 mm – Max 240 mm | L=255 mm | H=115 mm |

• Accessories : EHEDG bolt and rubber pad can be found on pages 18/19

3A Hygienic levelling feet with vulcanized blue rubber base and sealed spindle

The hygienic levelling feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications. The spindle and base are sealed with silicone gasket. The sleeve is sealed with silicone gasket to the smooth end of the spindle and sealed to the mounting place at the equipment with silicone gasket. The sleeve also functions as a nut.

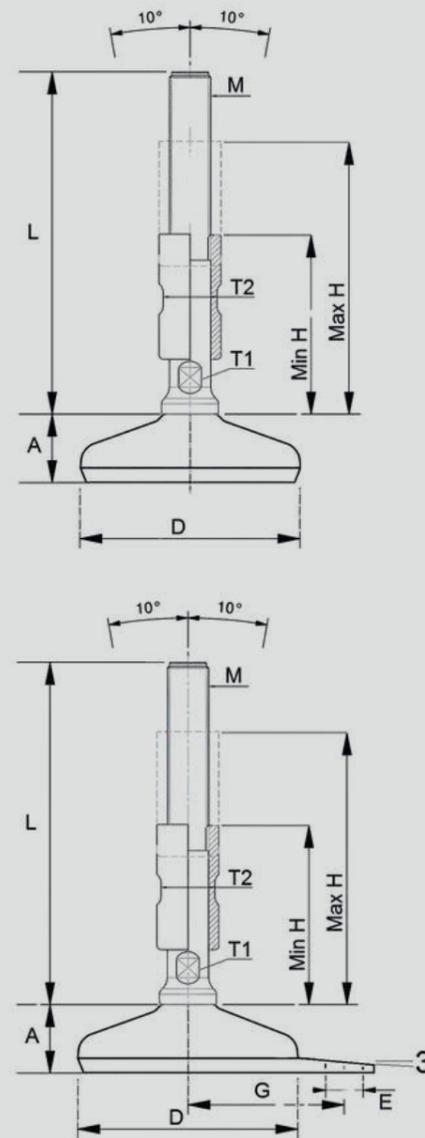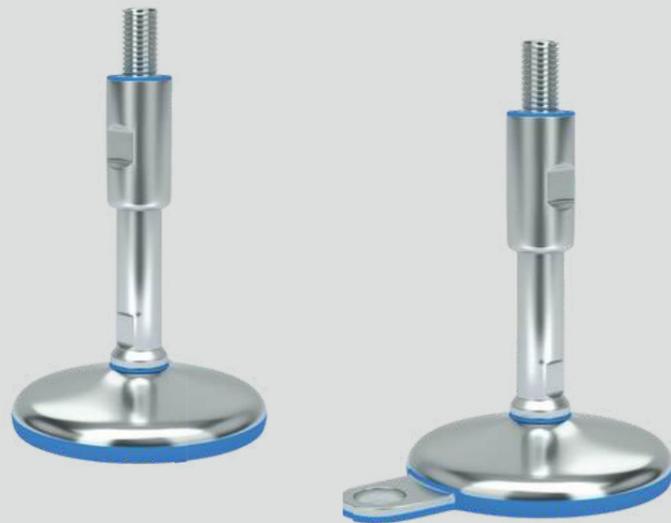

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability and comply with 3A regulation.

3A Hygienic levelling feet with vulcanized blue rubber base and sealed spindle



Ordering code : CLF (B) [Diam.base D] + 3A-M [Threads M]x[L]/[H]-(B)
 Example : CLF 80 + 3A-M20x135/55-(B)

* **BLUE** - stock/preferred type **GREY** - On request



| CLF blue base | CLF 50 | CLF 60 | CLF 80 | CLF 100 | CLF 120 | CLF 140 |
|----------------------|---------|---------|----------|----------|----------|----------|
| Base Diameter D [mm] | 50 | 60 | 80 | 100 | 120 | 140 |
| Base Height A [mm] | 25 | 25 | 28 | 32 | 36 | 36 |
| Nom. Load [N] | 7.000 N | 7.000 N | 15.000 N | 20.000 N | 30.000 N | 50.000 N |



| CLFB blue base with 1 fixation | CLFB 60 | CLFB 80 | CLFB 100 | CLFB 120 |
|--------------------------------|---------|----------|----------|----------|
| Base Diameter D [mm] | 60 | 80 | 100 | 120 |
| Base Height A [mm] | 25 | 28 | 32 | 36 |
| Lock hole distance G [mm] | 45.5 | 55.5 | 68 | 81 |
| Lock hole diameter E [mm] | 15 | 15 | 19 | 19 |
| Nom. Load [mm] | 7.000 N | 15.000 N | 20.000 N | 30.000 N |

3A-Spindle including the sleeve with silicone seals and bayonet fitting to base (Type B)




| M(thread) | 3A-M16x135/55-(B) | 3A-M16x175/75-(B) | 3A-M16x215/95-(B) | 3A-M20x255/115-(B) |
|-----------|-------------------|-------------------|-------------------|--------------------|
| M16 | 3A-M16x135/55-(B) | 3A-M16x175/75-(B) | 3A-M16x215/95-(B) | 3A-M20x255/115-(B) |
| M20 | 3A-M20x135/55-(B) | 3A-M20x175/75-(B) | 3A-M20x215/95-(B) | 3A-M24x255/115-(B) |
| M24 | | 3A-M24x175/75-(B) | 3A-M20x215/95-(B) | 3A-M24x255/115-(B) |
| M30 | | | 3A-M30x215/95-(B) | 3A-M24x255/115-(B) |



| Adj. Height (Hmin-Hmax) | 3A Spindle (L) | Sleeve(H) |
|-------------------------------------------|----------------|-----------|
| Adjustable height Min 80 mm – Max 120 mm | L=135 mm | H=55 mm |
| Adjustable height Min 100 mm – Max 160 mm | L=175 mm | H=75 mm |
| Adjustable height Min 120 mm – Max 200 mm | L=215 mm | H=95 mm |
| Adjustable height Min 140 mm – Max 240 mm | L=255 mm | H=115 mm |

CLF stainless steel machine feet with full threaded spindle mounting

The hygienic levelling feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications.

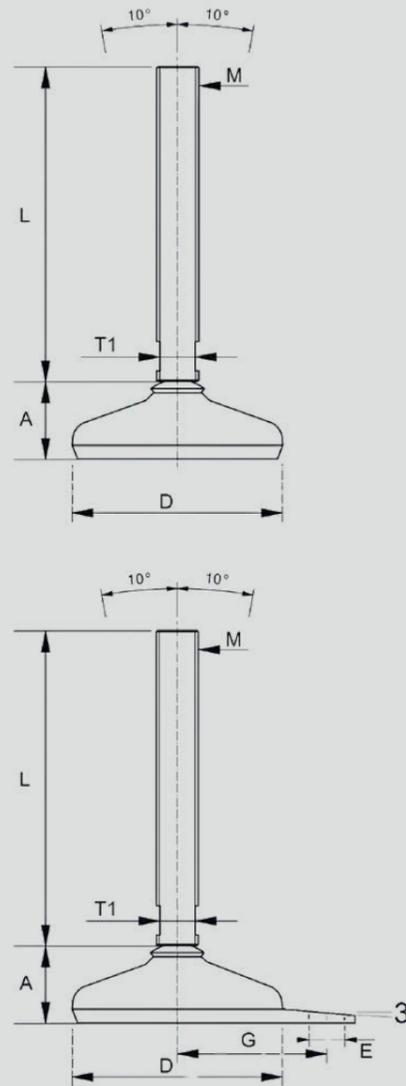

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

CLF stainless steel machine feet with full threaded spindle mounting



Ordering code: CLF [Diam.base D] + HM [Thread M] x [L]

Example : CLF 80 + HM16x100

* **BLUE** - stock/preferred type

GREY - On request



| CLF blue base | CLF 50 | CLF 60 | CLF 80 | CLF 100 | CLF 120 | CLF 140 |
|----------------------|---------|---------|----------|----------|----------|----------|
| Base Diameter D [mm] | 50 | 60 | 80 | 100 | 120 | 140 |
| Base Height A [mm] | 25 | 25 | 28 | 32 | 36 | 36 |
| Nom. Load [N] | 7.000 N | 7.000 N | 15.000 N | 20.000 N | 30.000 N | 50.000 N |



| CLFB blue base with 1 fixation | CLFB 60 | CLFB 80 | CLFB 100 | CLFB 120 |
|--------------------------------|---------|----------|----------|----------|
| Base Diameter D Base [mm] | 60 | 80 | 100 | 120 |
| Height A [mm] | 25 | 28 | 32 | 36 |
| Lock hole distance G [mm] | 45.5 | 55.5 | 68 | 81 |
| Lock hole diameter E [mm] | 15 | 15 | 19 | 19 |
| Nom. Load [N] | 7.000 N | 15.000 N | 20.000 N | 30.000 N |



HM A2-70 Spindle length (L):

M12 : 70mm, 100mm, 120mm, 150 mm, 180 mm

M16 : 70mm, 100mm, 120mm, 150mm, 180mm, 200mm


M20 : 70 mm, 100 mm, 120mm, 150mm, 180mm, 200mm

M24 : 70 mm, 100 mm, 120 mm, 150mm, 180 mm, 200mm

M30 : 70 mm, 100 mm, 120 mm, 150mm, 180 mm, 200mm

CLF EH stainless steel machine feet with protected spindle

The spindles are smooth at the end towards the base and the sleeve covers the thread. These features ensure easy cleaning and protect the threads. The sleeve functions as a nut.

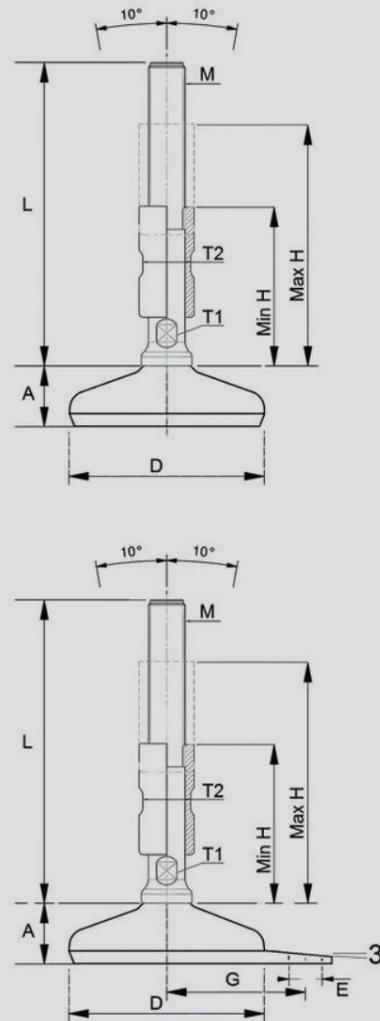

The stainless steel 1.4301 base plate are embedded with blue NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

CLF EH stainless steel machine feet with protected spindle



Ordering code: CLF(B) [Diam.base D] + EHM[Thread M]x[L]
Example : CLF 80 + EHM16 x100

* **BLUE** - stock/preferred type **GREY** - On request



| CLF blue base | CLF 50 | CLF 60 | CLF 80 | CLF 100 | CLF 120 | CLF 140 |
|----------------------|---------|---------|----------|----------|----------|----------|
| Base Diameter D [mm] | 50 | 60 | 80 | 100 | 120 | 140 |
| Base Height A [mm] | 25 | 25 | 28 | 32 | 36 | 36 |
| Nom. Load [N] | 7.000 N | 7.000 N | 15.000 N | 20.000 N | 30.000 N | 50.000 N |



| CLF blue base 1 with fixation | CLFB 60 | CLFB 80 | CLFB 100 | CLFB 120 |
|-------------------------------|---------|----------|----------|----------|
| Base Diameter D [mm] | 60 | 80 | 100 | 120 |
| Base Height A [mm] | 25 | 28 | 32 | 36 |
| Lock hole distance G [mm] | 45.5 | 55.5 | 68 | 81 |
| Lock hole diameter E [mm] | 15 | 15 | 19 | 19 |
| Nom. Load [N] | 7.000 N | 15.000 N | 20.000 N | 30.000 N |

Spindle including the sleeve and bayonet fitting to base (Type EH)



M(thread)


| | | | | |
|------------|---------------|---------------|---------------|----------------|
| M16 | EH-M16x135/55 | EH-M16x175/75 | EH-M16x215/95 | |
| M20 | EH-M20x135/55 | EH-M20x175/75 | EH-M20x215/95 | EH-M20x255/115 |
| M24 | | EH-M24x175/75 | EH-M20x215/95 | EH-M24x255/115 |
| M30 | | | EH-M30x215/95 | EH-M24x255/115 |



| Adj. Height (Hmin-Hmax) | EH Spindle (L) | Sleeve (H) |
|-------------------------------------------|----------------|------------|
| Adjustable height Min 80 mm – Max 120 mm | L=135 mm | H=55 mm |
| Adjustable height Min 100 mm – Max 160 mm | L=175 mm | H=75 mm |
| Adjustable height Min 120 mm – Max 200 mm | L=215 mm | H=95 mm |
| Adjustable height Min 140 mm – Max 240 mm | L=255 mm | H=115 mm |

HS stainless steel machine feet with full threaded spindle mounting

The hygienic machine feet have a rounded and hygienic design which makes it easy to clean and suitable for demanding sanitary applications.

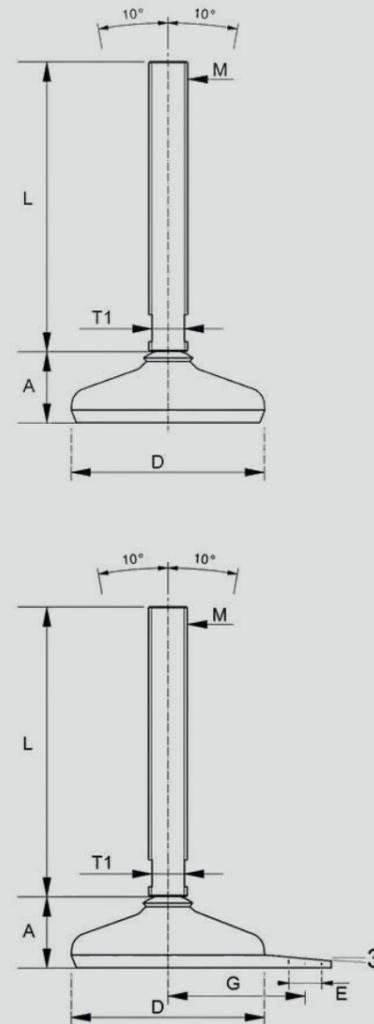

The stainless steel 1.4301 base plate is embedded with black NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

HS stainless steel machine feet with full threaded spindle mounting



Ordering code: **HS(B) [Diam.base D] + H[Threads M]x[L]**
 Example : HS 80 + HM16x150

* **BLUE** - stock/preferred type **GREY** - On request



| HS black base | HS 50 | HS 60 | HS 80 | HS 100 | HS 120 | HS 140 |
|----------------------|---------|---------|----------|----------|----------|----------|
| Base Diameter D [mm] | 50 | 60 | 80 | 100 | 120 | 140 |
| Base Height A [mm] | 25 | 25 | 28 | 32 | 36 | 36 |
| Nom. Load [N] | 7.000 N | 7.000 N | 15.000 N | 20.000 N | 30.000 N | 50.000 N |



| HSB black base with 1 fixation | HSB 60 | HSB 80 | HSB 100 | HSB 120 |
|--------------------------------|---------|----------|----------|----------|
| Base Diameter D [mm] | 60 | 80 | 100 | 120 |
| Base Height A [mm] | 25 | 28 | 32 | 36 |
| Lock hole distance G [mm] | 45.5 | 55.5 | 68 | 81 |
| Lock hole diameter E [mm] | 15 | 15 | 19 | 19 |
| Nom. Load [N] | 7.000 N | 15.000 N | 20.000 N | 30.000 N |



HM A2-70 Spindle length (L):


- M12** : 70mm, 100mm, 120mm, 150 mm
- M16** : 70mm, 100mm, 120mm, 150mm, 180mm, 200mm, 230 mm, 280 mm
- M20** : 120mm, 150mm, 180mm, 200mm, 230 mm, 280 mm, 330 mm
- M24** : 120 mm, 150mm, 180 mm, 200mm, 230 mm, 280 mm, 330 mm
- M30** : 180mm, 200mm, 230 mm, 280 mm, 330 mm

EHM stainless steel machine feet with protected spindle

The spindles are smooth at the end towards the base and the sleeve covers the thread. These features ensure easy cleaning and protect the threads. The sleeve functions as a nut.



The stainless steel 1.4301 base plate is embedded with black NBR FDA certified (FDA CFR 21 177 2600) anti-slip rubber with unique batch ID number for food safety traceability.

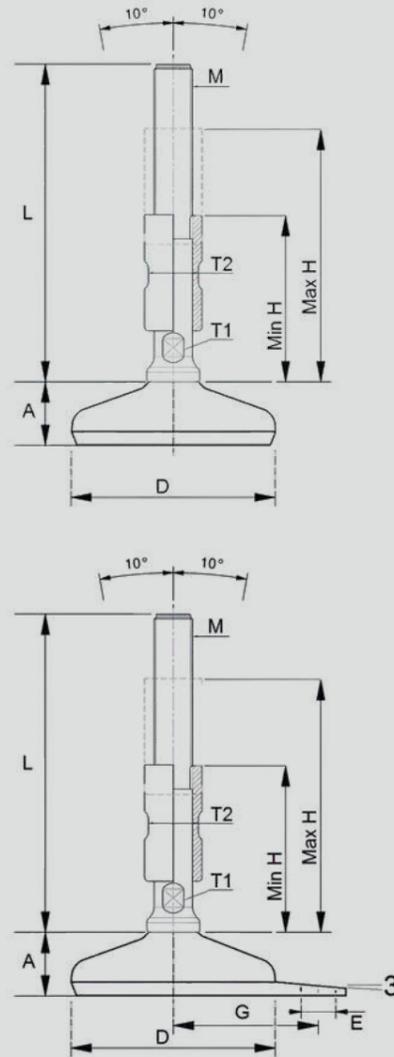

EHM stainless steel machine feet with protected spindle



Ordering code: HS(B) [Diam.base D] + EH[Threads M]x[L]/[H]
 Example : HS 80 + EHM16x 40/55 including sleeve

* **BLUE** - stock/preferred type **GREY** - On request



| HS black base | HS 50 | HS 60 | HS 80 | HS 100 | HS 120 | HS 140 |
|----------------------|---------|---------|----------|----------|----------|----------|
| Base Diameter D [mm] | 50 | 60 | 80 | 100 | 120 | 140 |
| Base Height A [mm] | 25 | 25 | 28 | 32 | 36 | 36 |
| Nom. Load [N] | 7.000 N | 7.000 N | 15.000 N | 20.000 N | 30.000 N | 50.000 N |



| HSB black base with 1 fixation | HSB 60 | HSB 80 | HSB 100 | HSB 120 |
|--------------------------------|---------|----------|----------|----------|
| Base Diameter D [mm] | 60 | 80 | 100 | 120 |
| Base Height A [mm] | 25 | 28 | 32 | 36 |
| Lock hole distance G [mm] | 45.5 | 55.5 | 68 | 81 |
| Lock hole diameter E [mm] | 15 | 15 | 19 | 19 |
| Nom. Load [N] | 7.000 N | 15.000 N | 20.000 N | 30.000 N |

Spindle including the sleeve and bayonet fitting to base (Type EH)



| M(thread) | EH-M16x135/55 | EH-M16x175/75 | EH-M16x215/95 | EH-M20x255/115 |
|-----------|---------------|---------------|----------------|----------------|
| M16 | EH-M16x135/55 | EH-M16x175/75 | EH-M16x215/95 | EH-M20x255/115 |
| M20 | EH-M20x135/55 | EH-M20x175/75 | EH-M20x215/95 | EH-M24x255/115 |
| M24 | EH-M24x175/75 | EH-M20x215/95 | EH-M24x255/115 | |
| M30 | | EH-M30x215/95 | EH-M24x255/115 | |



| Adj. Height (Hmin-Hmax) | EHM Spindle (L) | Sleeve length (H) |
|-------------------------------------------|-----------------|-------------------|
| Adjustable height Min 80 mm – Max 120 mm | L=135 mm | H=55 mm |
| Adjustable height Min 100 mm – Max 160 mm | L=175 mm | H=75 mm |
| Adjustable height Min 120 mm – Max 200 mm | L=215 mm | H=95 mm |
| Adjustable height Min 140 mm – Max 240 mm | L=255 mm | H=115 mm |

EHEDG 3A Hygienic spindle top cover in stainless steel

The hygienic spindle topcover which also meets sanitary standards, ensuring it aligns with global industry requirements. The smooth surface design prevents the buildup of bacteria and contaminants, while its durability ensures long-lasting performance in high-pressure cleaning environments. Self-draining surfaces with a maximal roughness of 0.8 µm Ra.

* **BLUE** - stock/preferred type

GREY - On request

3A Hygienic spindle top cover

Spindle top cover 3A M12-L50

Spindle top cover 3A M12-L70

Spindle top cover 3A M12-L90

Spindle top cover 3A M12-L110

Spindle top cover 3A M16-L50

Spindle top cover 3A M16-L70

Spindle top cover 3A M16-L90

Spindle top cover 3A M16-L110

Spindle top cover 3A M20-L50

Spindle top cover 3A M20-L70

Spindle top cover 3A M20-L90

Spindle top cover 3A M20-L110

Spindle top cover 3A M24-L50

Spindle top cover 3A M24-L70

Spindle top cover 3A M24-L90

Spindle top cover 3A M24-L110

Spindle top cover 3A M30-L50

Spindle top cover 3A M30-L70

Spindle top cover 3A M30-L90


Spindle top cover 3A M30-L110

Spindle top cover 3A M36-L50

Spindle top cover 3A M36-L70

Spindle top cover 3A M36-L90

Spindle top cover 3A M36-L110

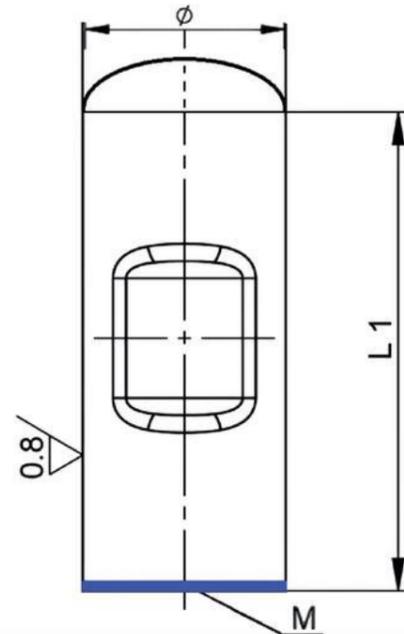

EHEDG 3A Hygienic nut in stainless steel Aisi 1.4301

The hygienic nuts with blue sealing. The seal blocks out water and bacteria and also prevents a non-hygienic metal-to-metal assembly. The nuts have self-draining surfaces with a maximal roughness of 0.8 µm Ra. The design of the nuts does not deviate from the sizes of current standard nuts. Therefore, wrench sizes, thread heights etc. all remains the same making it very easy to upgrade and replace standard nuts. This is the right choice of nuts to be used on all machinery in all certified hygienic wash-down environments.

* **BLUE** - stock/preferred type

GREY - On request

3A Hygienic nut in Aisi 1.4301

3A HN M5-L12 Ø12

3A HN M5-L18 Ø12

3A HN M6-L12 Ø12

3A HN M6-L18 Ø12

3A HN M8-L14 Ø15

3A HN M8-L21 Ø15

3A HN M10-L16 Ø18

3A HN M10-L24 Ø18

3A HN M12-L18 Ø22

3A HN M12-L27 Ø22

3A HN M16-L20 Ø28

3A HN M16-L30 Ø28

3A HN M16-L20 Ø32


3A HN M16-L30 Ø32

3A HN M24-L24 Ø40

3A HN M24-L36 Ø40

3A HN M30-L26 Ø46

3A HN M30-L39 Ø46

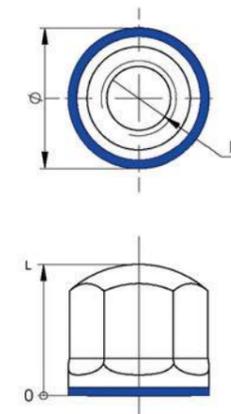

NBR rubber pad - anti slip for feet CAF(B) and CSF(B)

| Diameter | Type |
|----------|---------|
| 58 | RBP 58 |
| 78 | RBP 78 |
| 98 | RBP 98 |
| 118 | RBP 118 |
| 138 | RBP 138 |
| 158 | RBP 158 |
| 178 | RBP 178 |



Contactgegevens

Caldic Techniek B.V.
Schuttevaerweg 60
3044 BB Rotterdam
+31 (0)10 415 66 22
atverkoop@caldic-techniek.nl
www.caldic-techniek.nl